
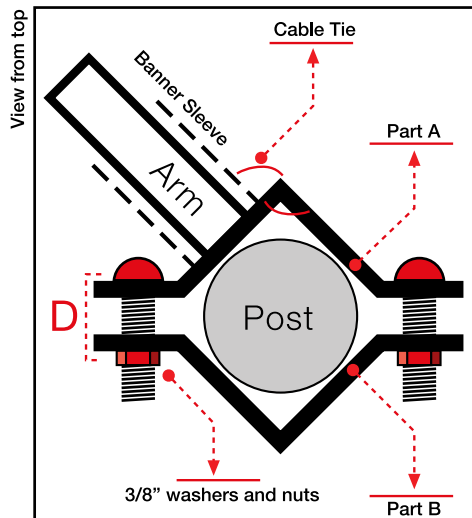


# Vintage Bracket

## Banner Mounting Hardware.

- Available in various colors.
- Single or Double Brackets.
- Easy installation and adjustments.
- No strapping system required.
- Stock or custom colors.
- Cost effective.
- 3 year warranty
- Can be custom manufactured and retro-fitted to accommodate any light-pole structure.

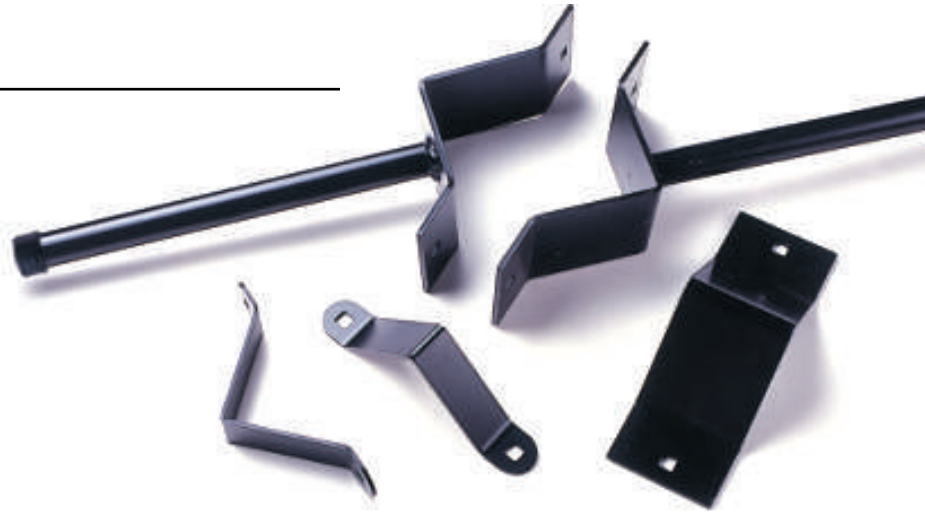

**Part A:** Attach to Part B around lamp post.

**Part B:** Attach to Part A around lamp post.

**Cable Tie:** Runs through grommets in the banner and the space between brackets and post.

**D:** Carriage Bolts. Purchase your carriage bolts 1/4" to 1/2" longer than this measurement when brackets are held at installation position on the lamp post.

### Needed to install each bracket:

2 pieces - 3/8" carriage bolts

2 pieces - 3/8" flat washers

2 pieces - 3/8" hex nuts

Please note: It is suggested you purchase galvanized hardware.

18" long cable ties (available in bulk packs)

## Vintage Bracket Installation Instructions:

### Preliminary

Take (1) Part A and (1) Part B and hold them in place around your lamp post. Measure the outer distance of the mounting plates. Add \_\_\_" to this measurement to arrive at the length of the 3/8" carriage bolts you will need to install the brackets.

Purchase 2pcs. 3/8" carriage bolts, 2pcs. 3/8" flat washers, 2pcs. 3/8" hex nuts, and 1pc. 18" cable tie for every bracket you are going to install. Galvanized hardware is recommended.

### Installation

Step 1: Attach using just 1 carriage bolt, 1 flat washer, and 1 hex nut part A to Part B. Do not tighten nut

### Top Bracket

Step 2: Hold part A in place up against the lamp post. Swing part B into position put the second carriage bolt through the wholes and fasten with flat washer and hex nut. Tighten the hex nuts with the bracket in place.

### Banner

Step 3: Slide the top banner sleeve onto the arm of part A.

### Bottom Bracket

Step 4: Repeat Step 1 and slide the banner arm through the bottom sleeve of the banner. The bracket will dangle in place against the post.

Step 5: Repeat Step 2 and pulling down on the bracket as you tighten the nuts so the banners are stretched tight once both brackets are fully tightened.

Step 6: Run the cable tie through the grommet in the top banner around the "gap" between the bracket and the post. Pull the cable tie tight and snip off excess. (This prevents the banner from sliding off the bracket)

Step 7 Repeat Step 6 for the bottom bracket.